

LP Tank Truck

MODEL **BLP-6**

Everyone that operates a LP forklift will confirm you always run out of LP Gas at the furthest distance from the LP storage area. The operator must carry the 50 pound LP gas tank to the forklift and lift it about 5 feet. For some there is no problem, for others it's a "back injury," waiting to happen.

INCREASE EFFICIENCY

REDUCE OPERATOR STRESS

HEAVY DUTY CONSTRUCTION

EASY SETUP & OPERATION

DECREASE INJURIES



The leading cause of forklift driver injuries is the back injury caused by lifting LP tanks. (NPGA Report)

Push Handle

The Two Upper Cylinder Saddles Rotate for Easy Access to Lower Cylinders

SPECIFICATIONS

Width	33"
Length	80"
Height	73"
Storage Capacity	6 Tanks
Front Casters	8" x 2"
Back Casters	8" x 2"
Caster Style	Phenolic
Weight (Empty)	750 lbs.

Eliminate the difficulty of raising, storing or transporting LP tanks and use just one person. The *Ergonomic LP Tank Truck*, model **BLP-6**, is designed to transport and store up to six full LP tanks, while minimizing back injuries and other stresses on the user.

No lifting is involved when using this ergonomically correct cart; a boom will swing around and with automatic clamps on each end, will pick up the full 50 pound LP tank and swivel around to place the tank on a rack, shelf or the back of a fork truck. A knob on the bottom of the boom controls the speed for lowering the tank. Now one person can easily load or unload a rack or fork truck. This unit can be knocked down by one person for shipping and storage. Units are powder coated for long term wear.




***LOAD TANK INTO TRUCK
FROM SIDE OR END OF CART***

Portable Hoist

SERIES **BP-JIB**

COUNTERBALANCED / CANTILEVER DESIGN

- Swivel Crane for Side Loading
- Outriggers to Increase Stability
- Double Acting Pump
- Controlled Lowering
- Expedited & Increased Cable Down Reach
- Provided with or without Counterbalancing Ballast
- When Ordering without Ballast, Empty Sand Bags are Provided (Instructions included)

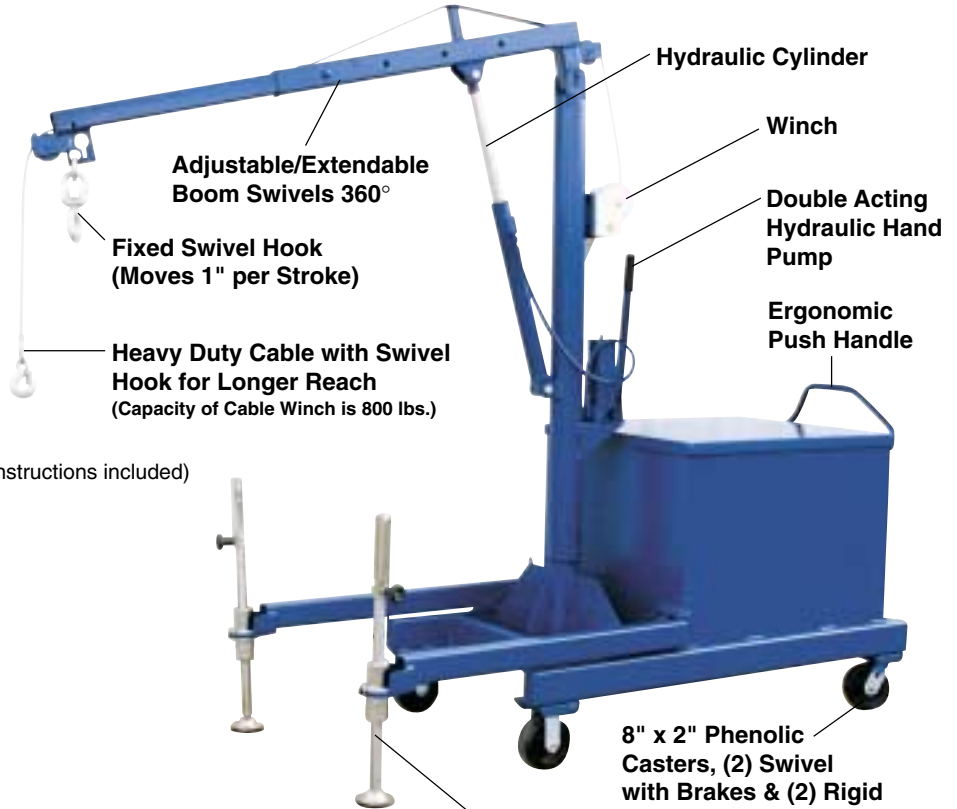

Capacity at Each Length	Model P-JIB-2	Model P-JIB-4
27"	2,000	4,000
34"	1,600	3,200
41"	1,300	2,600
48"	1,100	2,200

Capacity of Cable Winch is 800 lbs.

Specifications	Lift Arm Projections
Width	Beyond Frame
Length	Outriggers
Height	Casters
	Weight (empty)

OUTRIGGERS INCREASE STABILITY AND FLEXIBILITY



STEP ONE

Stabilize outriggers and lock unit into place. Pump boom up to desired height.



STEP TWO

Extend boom to desired length and attach cable/hook to the item your lifting.



STEP THREE

Rotate boom as required.

Beacon Industries, Inc.
 12300 Old Tesson Rd.
 St. Louis, MO 63128-2247 USA
 Phone: (314) 487-7600 Fax: (314) 487-0100
www.beacontechology.com
 E-Mail: sales@beacontechology.com