



SPECIALTY LITE LOAD LIFTS

Low Profile Design



Hand Operated Winch with Automatic Positive Lock or Hydraulic Foot Pump Available

MANUAL HAND CRANK WINCH OPERATION WITH CABLE FOR PRECISE POSITIONING
 Transport boxes or small crates with minimal lifting. Ergonomic design allows the operator to load material from ground level. Platform is 1/4" thick with 2" high side lips and completely lowers to ground. Raise and lower material with either a winch or hydraulic foot pump operation. 6" x 2" mold-on-rubber wheels on the back of the lift and 2" diameter semi-steel wheels on the front provide smooth maneuvering from one workstation to another. Horizontal load center is 10" and the capacity is 500 lbs.

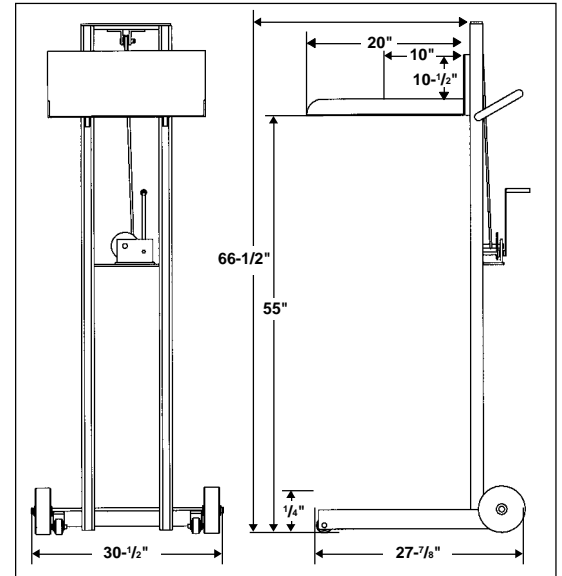


MODEL NUMBER	OPERATION	PLATFORM SIZE (W x L)	SERVICE RANGE	FRONT WHEELS
BLLPW-500-FW	WINCH	20" x 20"	1/4" to 55"	2" RIGID STEEL
BLLPH-500-FW	HYDRAULIC	20" x 20"	1/4" to 50"	2" RIGID STEEL

Low Profile Straddle Design



**Model
BLLPW-500-4SFL**

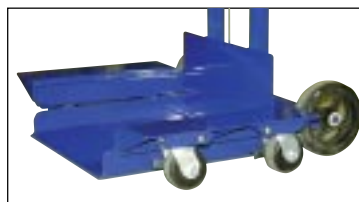

Load and Unload Product from Ground Level

Load and unload products from ground level with ease. Perfect for packages, small crates and dollies. Transporting and lifting products has never been so easy. Four front 4" swivel casters and two 8" x 2" rear wheels give the operator complete control of the cart. Ideal in warehouses, shipping docks, post offices, grocery stores and inventory rooms. A hand winch with automatic positive lock raises packages up to an ergonomic height.

SPECIFICATIONS	
Capacity	500 lbs.
Platform Width	20"
Overall Width	37-1/2"
Platform Length	20"
Load Center	10"
Raised Height	58"
Lowered Height	1/4"
Rear Wheels	8" x 2"
Front Wheels	4" x 2"

SPECIALTY LITE LOAD LIFTS

Lightweight Aluminum Design



MANUAL HAND CRANK WINCH OPERATION WITH CABLE FOR PRECISE POSITIONING

Maneuver easily with (4) front swivel wheels, model BALLW-2420-4SFL, or tilt back on rear wheels and use like a hand truck, model BALLW-2020-FW



Lightweight unit ideal for delivery trucks and vans. Hand winch operation with automatic positive lock for raising and lowering platform. Ergonomic design allows the operator to load material from ground level without bending over. Smooth maneuvering from one workstation to another. Mold-on-rubber 6" x 2" rear wheels are standard. Capacity is 175 lbs.

MODEL NUMBER	OPERATION	PLATFORM SIZE (W x L)	SERVICE RANGE	FRONT WHEELS
BALLW-2020-FW	WINCH	20" x 20"	3-1/4" to 58"	2" RIGID STEEL
BALLW-2420-4SFL	WINCH	24" x 20"	6-1/4" to 59"	4" SWIVEL M.O.R.
BALLH-2020-FW	HYDRAULIC	20" x 20"	3-1/4" to 53"	2" RIGID STEEL

Winch & Hydraulic Steel Lifts

All welded steel construction for maximum stability provides ergonomic work positioning by eliminating bending and stretching.

series: **BLLW**
Hand Winch



FRONT WHEELS
2" diameter semi-steel wheels are standard



4 SWIVEL WHEELS
Suffix - 4SL

series: **BLLH**
Hydraulic Foot Pump



MODEL NUMBER	OPERATION	PLATFORM SIZE (W x L)	SERVICE RANGE	FRONT WHEELS
BLLW-2020-FW	WINCH	20" x 20"	3-1/4" to 58"	2" RIGID STEEL
BLLW-2420-4SFL	WINCH	24" x 20"	6-1/4" to 59"	4" SWIVEL M.O.R.
BLLH-2020-FW	HYDRAULIC	20" x 20"	3-1/4" to 53"	2" RIGID STEEL

FLOOR LOCK OPTION
Model BLLW-FL Available on both the BLLW & LLH series

Beacon Industries, Inc.
12300 Old Tesson Rd.
St. Louis, MO 63128-2247 USA
Phone: (314) 487-7600 Fax: (314) 487-0100
www.beacontechology.com
E-Mail: sales@beacontechology.com

Distributed By:

Bulletin: BLLP-0502
Copyright 2002