



ALUMINUM

WHEEL RISERS

Series **BATWR**

Elevate low trucks to dock height

- ◆ Safety treadplate provides positive traction
- ◆ All aluminum construction
- ◆ 30,000 lb. capacity per pair

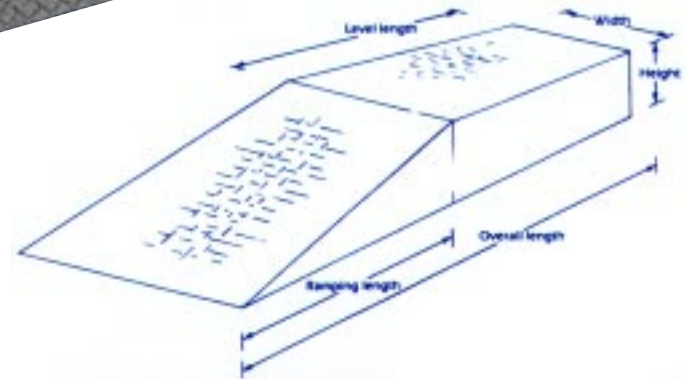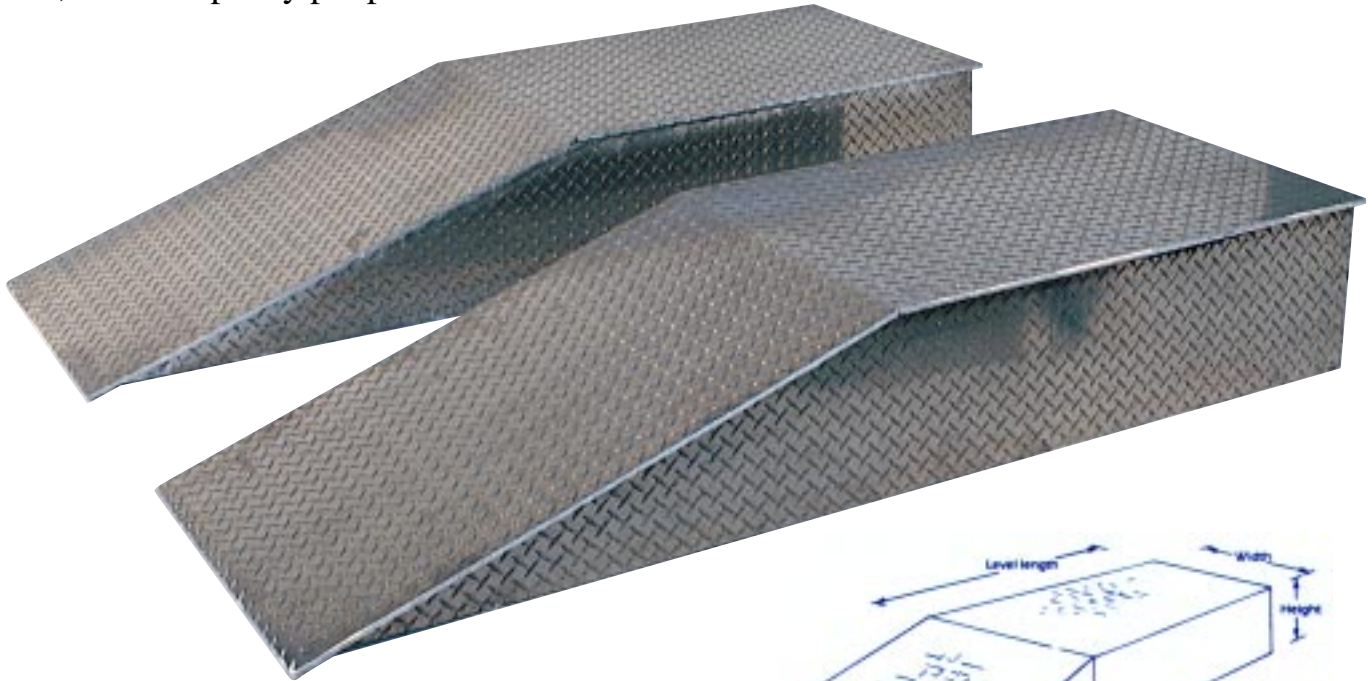

Wheel Risers are designed to facilitate compliance with OSHA requirements for a 10% maximum grade of ascending or descending loaded fork trucks.



Model **BATWR-WHL** portability kit allows one person to transport and place wheel risers.


HEIGHT	LENGTH		18" WIDE		24" WIDE	
	Level	Overall	MODEL	Weight (EA.)	MODEL	Weight (EA.)
6"	30"	48"	BATWR-18-6-48	60	BATWR-24-6-48	74
	36"	54"	BATWR-18-6-54	71	BATWR-24-6-54	87
	42"	60"	BATWR-18-6-60	81	BATWR-24-6-60	100
	84"	102"	BATWR-18-6-102	131	BATWR-24-6-102	160
8"	30"	54"	BATWR-18-8-54	78	BATWR-24-8-54	93
	36"	60"	BATWR-18-8-60	90	BATWR-24-8-60	109
	42"	66"	BATWR-18-8-66	103	BATWR-24-8-66	124
	84"	108"	BATWR-18-8-108	165	BATWR-24-8-108	199
10"	30"	60"	BATWR-18-10-60	96	BATWR-24-10-60	114
	36"	66"	BATWR-18-10-66	111	BATWR-24-10-66	132
	42"	72"	BATWR-18-10-72	126	BATWR-24-10-72	150
	84"	114"	BATWR-18-10-114	204	BATWR-24-10-114	244
12"	30"	66"	BATWR-18-12-66	117	BATWR-24-12-66	136
	36"	72"	BATWR-18-12-72	134	BATWR-24-12-72	157
	42"	78"	BATWR-18-12-78	151	BATWR-24-12-78	178
	84"	120"	BATWR-18-12-120	239	BATWR-24-12-120	283

STEEL

WHEEL RISERS

Series BSWR

- ◆ 40,000 lb. capacity per pair
- ◆ All Steel construction
- ◆ Safety treadplate provides positive traction

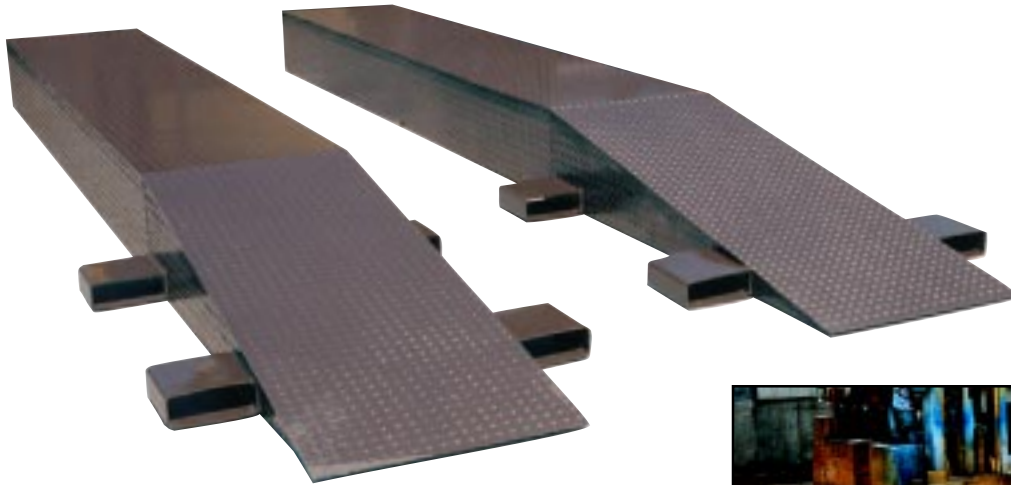

Series 400 Wheel Risers are equipped with fork slots for ease in fork truck transporting. Ramps may be stacked for compact storage when not in use. Fork pockets are 7 1/2" wide by 2 1/2" high usable.



Optional pre-aligned, pre-spaced parallel ramps attached by a pick-up connector. Lift trucks simply lower the unit in place. Overall width is 102". Use suffix - BCPL.

HEIGHT	OVERALL LENGTH	LEVEL LENGTH	18" WIDE		24" WIDE	
			MODEL	Weight (EA.)	MODEL	Weight (EA.)
6"	48"	24"	BSWR-400-18-6-48	119	BSWR-400-24-6-48	144
	60"	36"	BSWR-400-18-6-60	144	BSWR-400-24-6-60	175
	72"	48"	BSWR-400-18-6-72	177	BSWR-400-24-6-72	216
	84"	60"	BSWR-400-18-6-84	203	BSWR-400-24-6-84	246
8"	60"	28"	BSWR-400-18-8-60	167	BSWR-400-24-8-60	199
	72"	40"	BSWR-400-18-8-72	196	BSWR-400-24-8-72	233
	84"	52"	BSWR-400-18-8-84	235	BSWR-400-24-8-84	281
	96"	64"	BSWR-400-18-8-96	264	BSWR-400-24-8-96	315
10"	60"	20"	BSWR-400-18-10-60	190	BSWR-400-24-10-60	224
	72"	32"	BSWR-400-18-10-72	222	BSWR-400-24-10-72	261
	84"	44"	BSWR-400-18-10-84	267	BSWR-400-24-10-84	315
	96"	56"	BSWR-400-18-10-96	299	BSWR-400-24-10-96	353
12"	72"	24"	BSWR-400-18-12-72	248	BSWR-400-24-12-72	289
	84"	36"	BSWR-400-18-12-84	284	BSWR-400-24-12-84	329
	96"	48"	BSWR-400-18-12-96	335	BSWR-400-24-12-96	391
	108"	60"	BSWR-400-18-12-108	370	BSWR-400-24-12-108	431

Wheel Risers are designed to facilitate compliance with OSHA requirements for a 10% maximum grade of ascending or descending loaded fork trucks.

Beacon Industries, Inc.
 12300 Old Tesson Rd.
 St. Louis, MO 63128-2247 USA
 Phone: (314) 487-7600 Fax: (314) 487-0100
www.beacontechnology.com
 E-Mail: sales@beacontechnology.com

Quality loading dock equipment since 1953.