

BEACONTM

AVIATION CHOCKS

For use with Aviation Vehicles and Equipment

FEATURES

- Impact-absorbing urethane
- Weather and abrasion resistant
- High load-bearing capacity
- Resistant to aircraft fuels, oils, and lubricants
- Eliminates Foreign Object Damage
- Optional anti-skid rubber pads for polished hanger floors

AVIATION CHOCKS include the AC Series, made of highly durable, lightweight polyurethane. AC Chocks last longer than wood chocks, never need painting and eliminate Foreign Object Damage threats for aircraft. The AC Series is ideal for private, commercial, cargo and military aircraft.

CUSTOMIZE YOUR CHOCKS


6800, 4600, and 3500 Series Aviation Wheel Chocks can be customized to reflect your company's unique identity with a special color or adding your logo on the chock.

- Lightweight and easy to use
- Will not rot, crack or splinter like wood
- Rope-lock system
- Optional rope carrying handle
- Molded-in high-visibility yellow color



AC6800 SERIES - for large and oversized aircraft

LR MODEL

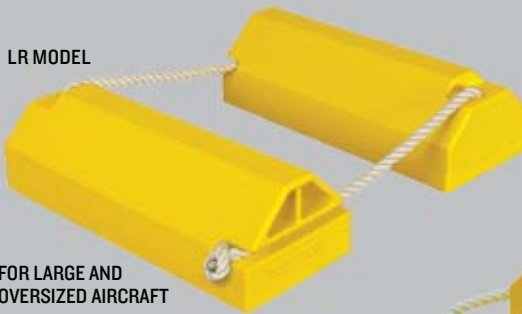

FOR LARGE AND OVERSIZED AIRCRAFT


ACROPE-QLR




AC6856 in-use



LR-H MODEL

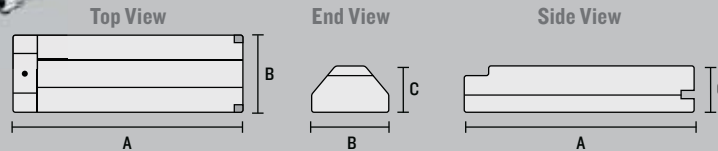

ROPE LOCK SYSTEM The original military style check-to-chock rope lock system allows a wheel chock to be temporarily and securely attached to the opposing wheel chock on the opposite side of the aircraft tire. This check-locking system ensures that wheel chocks remain firmly positioned against each side of the aircraft tire during engine test procedures.



AC6856 in-use

20 INCH MODELS


MODEL	DESCRIPTION	A: LENGTH	B: WIDTH	C: HEIGHT	LANYARD	WEIGHT	COLOR
AC6820-LR	Aviation Chock with 36" Locking Rope (no Rubber Pad)	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	36 in. (91.4 cm)	13.9 lb. (6.3 kg)	Hi-Vis Yellow
AC6820-QLR	Aviation Chock with 72" Looped Locking Rope (no Rubber Pad)	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	72 in. (183 cm)	14.4 lb. (6.5 kg)	Hi-Vis Yellow
AC6820-LR-H	Aviation Chock with Carrying Handle and 36" Locking Rope (no Rubber Pad)	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	36 in. (91.4 cm)	14.05 lb. (6.4 kg)	Hi-Vis Yellow
AC6820-QLR-H	Aviation Chock with Carrying Handle and 72" Looped Locking Rope (no Rubber Pad)	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	72 in. (183 cm)	14.55 lb. (6.6 kg)	Hi-Vis Yellow
AC6820-LR-RP	Aviation Chock with Rubber Pad and 36" Locking Rope	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	36 in. (91.4 cm)	18.9 lb. (8.6 kg)	Hi-Vis Yellow
AC6820-QLR-RP	Aviation Chock with Rubber Pad and 72" Looped Locking Rope	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	72 in. (183 cm)	19.4 lb. (8.8 kg)	Hi-Vis Yellow
AC6820-LR-RP-H	Aviation Chock with Carrying Handle, Rubber Pad and 36" Locking Rope	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	36 in. (91.4 cm)	19.05 lb. (8.6 kg)	Hi-Vis Yellow
AC6820-QLR-RP-H	Aviation Chock with Carrying Handle, Rubber Pad and 72" Looped Locking Rope	20 in. (50.8 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	72 in. (183 cm)	19.55 lb. (8.9 kg)	Hi-Vis Yellow
ACROPE-36X5/8	Replacement Locking Rope for AC6820	36 in. (91.4 cm)	.625 in. (1.6 cm)	.625 in. (1.6 cm)	36 in. (91.4 cm)	.25 lb. (.11 kg)	White
ACROPE-QLR	Replacement Looped Locking Rope for AC6820	72 in. (183 cm)	.625 in. (1.6 cm)	.625 in. (1.6 cm)	72 in. (183 cm)	.5 lb. (.23 kg)	White
ACPAD-6820	Replacement Rubber Pad for AC6820	17.25 in. (43.8 cm)	7.4 in. (18.8 cm)	.5 in. (1.3 cm)	N/A	5.0 lb. (2.3 kg)	Black

56 INCH MODELS

MODEL	DESCRIPTION	A: LENGTH	B: WIDTH	C: HEIGHT	LANYARD	WEIGHT	COLOR
AC6856-LR	Aviation Chock with 48" Locking Rope (no Rubber Pad)	56 in. (142.2 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	48 in. (122 cm)	36.25 lb. (16.4 kg)	Hi-Vis Yellow
AC6856-LR-RP	Aviation Chock with Rubber Pad and 48" Locking Rope	56 in. (142.2 cm)	8 in. (20.3 cm)	6 in. (15.2 cm)	48 in. (122 cm)	43.25 lb. (19.7 kg)	Hi-Vis Yellow
ACROPE-48X5/8	Replacement Locking Rope for AC6856	48 in. (122 cm)	.625 in. (1.6 cm)	.625 in. (1.6 cm)	48 in. (122 cm)	.35 lb. (.16 kg)	White
ACPAD-6856	Replacement Rubber Pad for AC6856	7.5 in. (19 cm)	5.6 in. (14.2 cm)	.5 in. (1.3 cm)	N/A	1.0 lb. (.5 kg)	Black

AC4600 SERIES - for mid-sized to large aircraft


LR MODEL

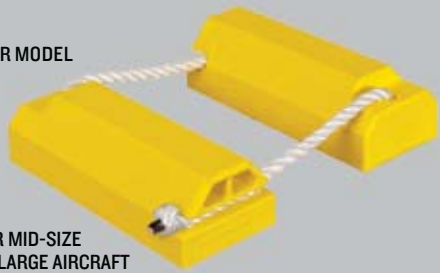

FOR MID-SIZE
TO LARGE AIRCRAFT



LR-H MODEL

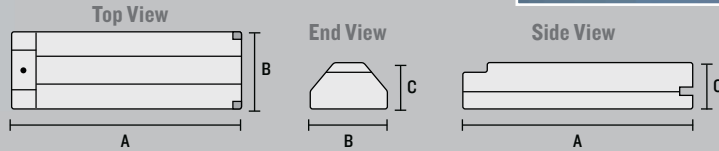


MODEL	DESCRIPTION	A: LENGTH	B: WIDTH	C: HEIGHT	LANYARD	WEIGHT	COLOR
AC4614-LR	Aviation Chock with 36" Locking Rope (no Rubber Pad)	14 in. (35.6 cm)	6 in. (15.2 cm)	4 in. (10.2 cm)	36 in. (91.4 cm)	6.2 lb. (2.8 kg)	Hi-Vis Yellow
AC4614-LR-H	Aviation Chock with Carrying Handle and 72" Looped Locking Rope (no Rubber Pad)	14 in. (35.6 cm)	6 in. (15.2 cm)	4 in. (10.2 cm)	36 in. (91.4 cm)	6.35 lb. (2.9 kg)	Hi-Vis Yellow
AC4614-LR-RP	Aviation Chock with Rubber Pad and 36" Locking Rope	14 in. (35.6 cm)	6 in. (15.2 cm)	4.25 in. (10.8 cm)	36 in. (91.4 cm)	8.3 lb. (3.8 kg)	Hi-Vis Yellow
AC4614-LR-RP-H	Aviation Chock with Carrying Handle and Rubber Pad	14 in. (35.6 cm)	6 in. (15.2 cm)	4.25 in. (10.8 cm)	36 in. (91.4 cm)	8.45 lb. (3.8 kg)	Hi-Vis Yellow
ACROPE-36X5/8	Replacement Locking Rope for AC4614	36 in. (91.4 cm)	.625 in. (1.6 cm)	.625 in. (1.6 cm)	36 in. (91.4 cm)	.25 lb. (.11 kg)	White
ACPAD-4614	Replacement Rubber Pad for AC4614	11.5 in. (29.2 cm)	5.5 in. (14.0 cm)	.5 in. (1.3 cm)	N/A	2.1 lb. (1.0 kg)	Black

AC3500 SERIES - for small to mid-sized aircraft

FOR SMALL TO MID-SIZED AIRCRAFT



An updated version of the original wood wheel chock design. Standard with 1/2 in. x 24 in. replaceable Polyester rope lanyard. Sold as singles or roped together in pairs.

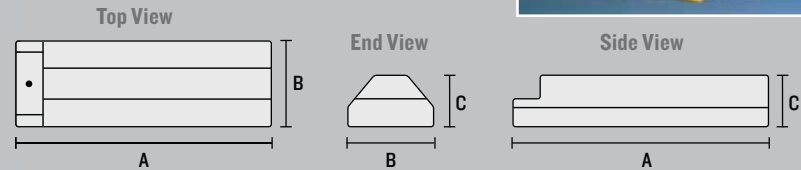

MODEL	DESCRIPTION	A: LENGTH	B: WIDTH	C: HEIGHT	LANYARD	WEIGHT (PAIR)	COLOR
AC3512	Aviation Chock	12 in. (30.5 cm)	5 in. (12.7 cm)	3 in. (7.6 cm)	24 in. (61.0 cm)	6.5 lb. (2.9 kg)	Hi-Vis Yellow
AC3512-RP	Aviation Chock with Rubber Base	12 in. (30.5 cm)	5 in. (12.7 cm)	3.25 in. (8.3 cm)	24 in. (61.0 cm)	8.4 lb. (3.8 kg)	Hi-Vis Yellow
AC3515	Aviation Chock	15 in. (38.1 cm)	5 in. (12.7 cm)	3 in. (7.6 cm)	24 in. (61.0 cm)	7.8 lb. (3.4 kg)	Hi-Vis Yellow
AC3515-RP	Aviation Chock with Rubber Base	15 in. (38.1 cm)	5 in. (12.7 cm)	3.25 in. (8.3 cm)	24 in. (61.0 cm)	10.4 lb. (4.4 kg)	Hi-Vis Yellow
AC3518	Aviation Chock	18 in. (45.7 cm)	5 in. (12.7 cm)	3 in. (7.6 cm)	24 in. (61.0 cm)	9.2 lb. (4.2 kg)	Hi-Vis Yellow
AC3518-RP	Aviation Chock with Rubber Base	18 in. (45.7 cm)	5 in. (12.7 cm)	3.25 in. (8.3 cm)	24 in. (61.0 cm)	12.0 lb. (5.6 kg)	Hi-Vis Yellow
AC3521	Aviation Chock	21 in. (53.3 cm)	5 in. (12.7 cm)	3 in. (7.6 cm)	24 in. (61.0 cm)	11.0 lb (5.0 kg)	Hi-Vis Yellow
AC3521-RP	Aviation Chock with Rubber Base	21 in. (53.3 cm)	5 in. (12.7 cm)	3.25 in. (8.3 cm)	24 in. (61.0 cm)	15.0 lb. (6.8 kg)	Hi-Vis Yellow
ACPAD3512	Replacement Rubber Pad for 3512	9.0 in. (22.6 cm)	4.5 in. (11.4 cm)	.5 in (1.3 cm)	N/A	.75 lb. (.34 kg)	Black
ACPAD3515	Replacement Rubber Pad for 3515	12 in. (30.4 cm)	4.5 in. (11.4 cm)	.5 in (1.3 cm)	N/A	1.2 lb. (.5 kg)	Black
ACPAD3518	Replacement Rubber Pad for 3518	15 in. (38.1 cm)	4.5 in. (11.4 cm)	.5 in (1.3 cm)	N/A	1.5 lb. (.7 kg)	Black
ACPAD3521	Replacement Rubber Pad for 3521	18 in. (45.7 cm)	4.5 in. (11.4 cm)	.5 in (1.3 cm)	N/A	1.75 lb. (.8 kg)	Black
ACROPE-3500-S	Replacement Locking Rope for Single AC3500	24 in (61.0 cm)	.5 in. (.2 cm)	.5 in (1.3 cm)	24 in. (61.0 cm)	.25 lb. (.1 kg)	White
ACROPE-3500-P	Replacement Locking Rope for Pair AC3500	24 in (61.0 cm)	.5 in. (.2 cm)	.5 in (1.3 cm)	24 in. (61.0 cm)	.25 lb. (.1 kg)	White

Specify after Model No.: S = Single; P = Pair

BEACONTM

AVIATION CHOCKS

For use with Aviation Vehicles and Equipment

FEATURES

- Impact-absorbing urethane
- Weather and abrasion resistant
- High load-bearing capacity
- Resistant to aircraft fuels, oils, and lubricants
- Eliminates Foreign Object Damage
- Optional anti-skid rubber pads for polished hanger floors

AVIATION CHOCKS include the AC Series, made of highly durable, lightweight polyurethane. AC Chocks last longer than wooden chocks, never need painting and eliminate Foreign Object Damage threats for aircraft. The AC Series is ideal for business, commercial, cargo and military aircraft.

- Lightweight and easy to use
- Will not rot, crack or splinter like wood
- Rope-lock system
- Optional rope carrying handle
- Molded-in high-visibility yellow color



AC200 SERIES - for small aircraft

Fits the curvature of the tire to absorb wheel-squat during loading and fueling operations. Features molded-in soft base for increased traction. 3/8 in. x 24 in. replaceable Polyester rope lanyard connects two chocks together. Custom rope lengths available. Sold in pairs.



MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	LANYARD	WEIGHT (PAIR)	COLOR
AC201	5.5 in. (14.0 cm)	4.5 in. (11.4 cm)	2.75 in. (7.0 cm)	24 in. (61.0 cm)	1.5 lb. (.68 kg)	Hi-Vis Yellow
UC200-S	5.5 in. (14 cm)	4.5 in. (11.4 cm)	2.5 in. (6.3 cm)	24 in. (61.0 cm)	1.6 lb (.7 kg)	Orange
UC200-M	7.5 in. (19 cm)	5.5 in. (14 cm)	2.5 in. (6.3 cm)	24 in. (61.0 cm)	2.2 lb. (1 kg)	Orange
UC200-L	9.5 in. (24.1 cm)	6.0 in. (15.2 cm)	2.5 in. (6.3 cm)	24 in. (61.0 cm)	3.15 lb. (1.4 kg)	Orange



AC6820-LR aviation chocks used on a McDonnell Douglas F-15 Eagle