

BEACON™

DUAL CHANNEL RAMPS

System features patented T-Connectors

FEATURES


- Protects cables and hoses up to 3.25" outside dia.
- Patented T-Connectors to extend to any length
- Reinforced hinged lid for easy cable placement
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Easy to transport, setup, disassemble, and store




T-Connector

MODEL: BCP2X325


2-CHANNEL CABLE PROTECTOR with hinged lid is one of the largest open top cable protectors on the market. This wide channel design provides a safer crossing for vehicles and pedestrian traffic while protecting valuable electrical cables and hose lines from damage in extreme weather conditions and work environments. Modular interlocking design is ideal for use in oil and gas applications, mining, military, and other industrial environments with heavy trucks and forklifts.

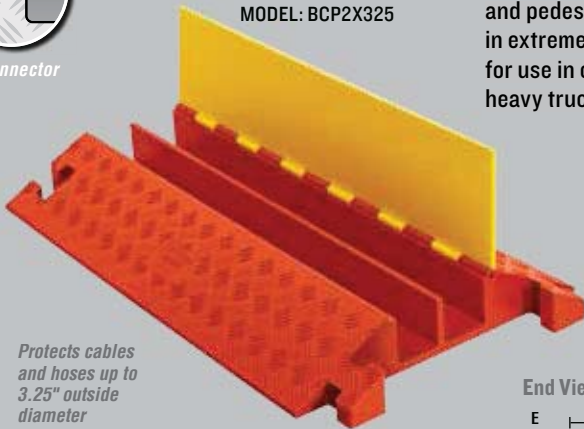

Protects cables and hoses up to 3.25" outside diameter




Lid/Base Color Options



LOAD CAPACITY

Max load tested at 70°F (21°C)

10,880 lb./Tire (4,935 kg)
21,760 lb./Axle (9,870 kg)



U.S. Patent No: D415,112

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
BCP2X325	36 in. (91.4 cm)	22 in. (55.88 cm)	4.13 in. (10.16 cm)	3.25 in. (8.26 cm)	3.25 in. (8.26 cm)	33 lb. (15.0 kg)



Cable Protectors with Protector Bridge on a construction site



Load capacity of up to 21,760 lb. per axle