

FORK & CARRIAGE MOUNTED FORKLIFT CARPET POLE


Transport rolls or coils with our sturdy Forklift Carpet Pole. Available in either carriage or fork mounted units. 2-3/4" diameter high strength, rotatable, replaceable pole has tapered tip. All rug rams are made of steel construction and painted blue.

Fork Mounted (Inverted) Rug Rams feature 7-1/2"W x 2-1/2"H fork pockets on 24" centers. Safety chain is a standard feature.

Carriage Mounted Rug Rams are available in class II or III and feature a spring loaded locking pin to secure to the carriage.

series BCRP

series BCR

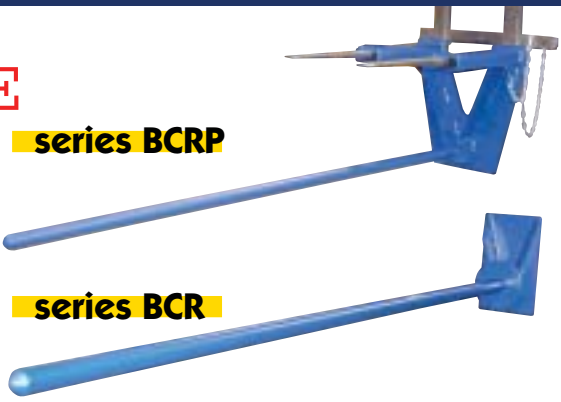

Model Number	Usable Pole Description	Usable Pole Length	Pole Diameter	Capacity (pounds)	Carriage Class	VCG (inches)	HCG (inches)	Lost Load (pounds)
BCRP-108	Fork Mount	108"	2-3/4"	2,500	--	5.7	78.5	526
BCRP-120	Fork Mount	120"	2-3/4"	2,200	--	5.6	87.9	550
BCRP-144	Fork Mount	144"	2-3/4"	1,800	--	5.4	108	570
BCR-108-2	Carriage Mount	108"	2-3/4"	2,500	2	7.7	35.7	397
BCR-120-2	Carriage Mount	120"	2-3/4"	2,200	2	7.6	40.7	421
BCR-144-2	Carriage Mount	144"	2-3/4"	1,800	2	7.4	51.2	478
BCR-108-3	Carriage Mount	108"	2-3/4"	2,500	3	8.6	34.0	345
BCR-120-3	Carriage Mount	120"	2-3/4"	2,200	3	8.5	38.9	366
BCR-144-3	Carriage Mount	144"	2-3/4"	1,800	3	8.0	48.0	416



Carriage Mount is available in Class II or III


FORK TRUCK FORK CADDY

Transport fork truck forks easily and safely. This caddy also allows the user to easily remove and install forks onto a fork truck. This is usually a dangerous and time consuming process, but now it is a breeze.

After transporting the fork to the forklift, rotate the handle 90° then slide the fork onto the carriage.

The Fork Caddy has easy-grip handles and rolls smoothly on two swivel casters. A fork tine lock secures the fork into the caddy to keep it in place while transporting.

The comfort-grip handle pivots up to 180° to allow for easier mobility. Lightweight and small enough to store and transport easily. Steel construction



model BFC-29



POWDER COATED TOUGH™

FORK TRUCK FORGED FORKS

Model Number	Capacity (lbs.) (24" Load Center)	Thickness (inches)	Length (inches)
BF4-1.25-36	3,000	1.25	36
BF4-1.25-48	3,000	1.25	48
BF4-1.50-36	4,000	1.50	36
BF4-1.50-42	4,000	1.50	42
BF4-1.50-48	4,000	1.50	48
BF4-1.50-60	4,000	1.50	60
BF4-1.75-36	5,000	1.75	36
BF4-1.75-42	5,000	1.75	42
BF4-1.75-48	5,000	1.75	48
BF4-1.75-60	5,000	1.75	60

- Four Inches Wide
- I.T.A. Class II
- Includes Locking Pin



Beacon Industries, Inc.
 12300 Old Tesson Rd.
 St. Louis, MO 63128-2247 USA
 Phone: (314) 487-7600 Fax: (314) 487-0100
beacontechology.com
 E-Mail: sales@beacontechology.com