


# BEACON

## DOCK DOOR SHELTERS

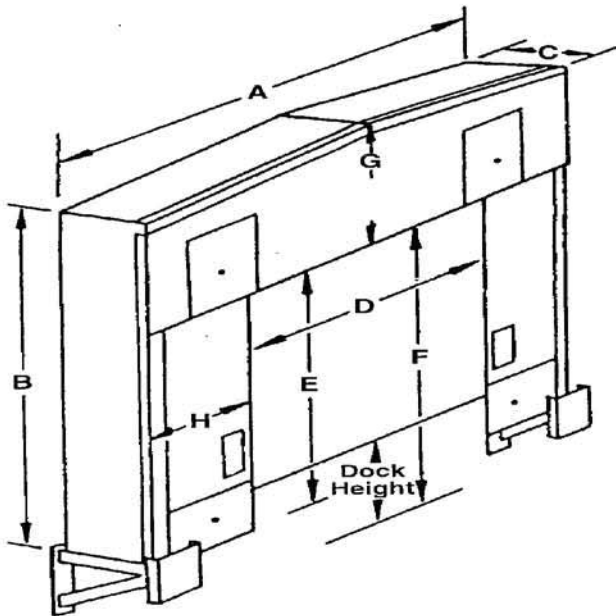

**Reinforced Fiberglass Sides and Top:** White polyurethane is secured to wood framework.

**Fiberglass Stays:** Stays to be contained between outer and inner covers and through-bolted to frame to assure constant pressure with truck.

**Front and side Curtains:** As specified by model, either neoprene, hypalon or vinyl.

**Protective Bumpers:** Special design heavy-duty steel bumpers: 21" (mm), 27", 30" and 39" (other projection avail).

**Normal Projection:** Recommended projection is 12" beyond bumper, leveler or point at which truck can proceed no further. Less than 12" truck entry is not functional. Standard projections available: 18", 24", 30" & 36". Non level approaches are crucial to truck shelter proj.

**Cushions-Bottom Seal:** 22 oz. per sq. yd. vinyl cover. Flexible resilient polyurethane foam core. Secured to the inside frame member at bottom on each side. Cushions seal to truck sides during use and return to shape upon exit.

**Roof Slope:** Frame top is peaked at center 7-1/2 degree angle to assure water is shed off to shelter sides and not into truck entrance area.

**Mounting Hardware:** All standard mounting hardware provided.

**Limited Warranty** - The Beacon Door-Seal is warranted against Manufacturing defects in material and work-manship for one year from date of installation. Our responsibility under this agreement shall be entirely fulfilled by furnishing, FOB factory, a replacement product or parts; or at our sole option by refund of the invoice value of the product shown to our satisfaction to be so defective within such warranted periods. This warranty is in lieu of all other express warranties.

**Approval**

I, the undersigned, hereby approve this print  
 As drawn     As marked

This includes my approval of design & dimensions  
 Signed: \_\_\_\_\_  
 Date: \_\_\_\_\_

### NORMAL CLEARANCES

| Door Width | Clearance Ea. Side | Overall Shelter Width |
|------------|--------------------|-----------------------|
| 8' 0"      | 21"                | 11' 6"                |
| 9' 0"      | 15"                | 11' 6"                |
| 10' 0"     | 9"                 | 11' 6"                |
| 11' 0"     | 3"                 | 11' 6"                |

Model: \_\_\_\_\_

No of Units: \_\_\_\_\_

Door Size: Wide: \_\_\_\_\_ Height: \_\_\_\_\_

Dock Bumper Projection: \_\_\_\_\_

Dock Height: \_\_\_\_\_

Approach:  % of Incline \_\_\_\_\_  
 % of Decline \_\_\_\_\_  
 Level Degree \_\_\_\_\_

Dimensions Outside Unit:  
 Width A: \_\_\_\_\_ Height B: \_\_\_\_\_

Front Opening: Width D: 7' 0" Height E: \_\_\_\_\_

Projection of Unit C: \_\_\_\_\_

Distance Bottom Horizontal Pad to  
 Ground F: \_\_\_\_\_

Horizontal Pad Height G: \_\_\_\_\_

Side Curtain Width H: \_\_\_\_\_

Distance between door openings: \_\_\_\_\_

Clearance At Sides and Top of Door For  
 Mounting \_\_\_\_\_

Special Building Details: \_\_\_\_\_

Color: \_\_\_\_\_ Unit With Yellow Stripe

**BEACON **  
**BEACON INDUSTRIES, INC.**  
 12300 Old Tesson Rd.  
 St. Louis, MO 63128-2247 USA  
 OFFICE: 314-487-7600 FAX: 314-487-0100