

BEACON™

DROP OVER CORD COVER

System features Dog Bone Connectors

FEATURES


- Protects cables and hoses up to 1.325" outside dia.
- Dog Bone Connectors to extend to any desired length
- Fast install with drop-over design
- All-weather polyurethane construction
- Patented 5-bar tread surface for maximum traction
- Connects to standard Guard Dog 5-channel



"Dog Bone" Connector

3-CHANNEL DROP-OVERS protect pipes, conduit, cable and hose lines that are permanently installed or mounted to the ground or floor. Drop-Overs protect from above but do not prevent abrasion from below and should be used on a flat surface only. Ideal for providing a safer crossing for vehicles and pedestrian traffic in public, commercial and industrial applications. This 3-Channel Drop Over System features two extra wide channels to accommodate various quantities and sizes of lines. These lightweight, 18" length Drop Overs are easy to store in service/utility trucks and use when needed.

Protects cables and hoses up to 1.325" outside diameter

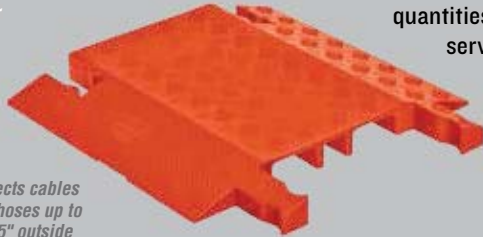

MODEL: BGD3-DO



Color Options - Specify after model number



Orange = O



Black = B




Yellow = Y

LOAD CAPACITY

Max load tested at 70°F (21°C)

10,500 lb./Tire (4,763 kg)

21,000 lb./Axle (9,526 kg)



End View



Features design that interconnects directly to a 5-channel Guard Dog cable protector!

MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	D: CHANNEL WIDTH	E: CHANNEL HEIGHT	WEIGHT
BGD3-DO	18 in. (45.72 cm)	19.75 in. (50.36 cm)	1.87 in. (4.76 cm)	D2: 3.2 in (8.16 cm) D: 1.65 in. (4.21 cm)	1.325 in. (3.37 cm)	9 lb. (4.2 kg)




ACCESSIBILITY RAMPS & RAILS for 3-Channel General Purpose Drop-Overs

3-CHANNEL ACCESSIBILITY RAMPS AND RAILS feature a gradual slope and slip-resistant surface in order to ensure a safer crossing point for carts, forklifts, vehicles with small wheels and heavy trucks. In addition, each ramp and rail system is manufactured to meet ADA and DDA compliant specifications.



ADA/DDA
Compliant

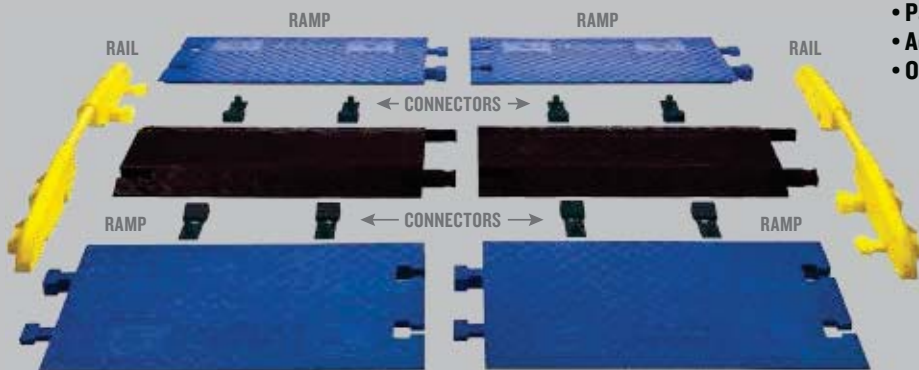

System shown with 4 General Purpose Drop Overs, 2 pairs of ramps, 8 connectors and 2 rails.


Ramps available only in blue and rails available only in yellow.

- Patented, modular ADA/DDA Compliant ramps
- Add ramps and rails when requirements specify
- One person installation - no tools required


LOAD CAPACITY
Max load tested at 70°F (21°C)
20,150 lb./Tire (9,140 kg)
40,300 lb./Axle (18,280 kg)

U.S. Patent No: 6,481,036

RAMPS - BCPRP-3GD-DO

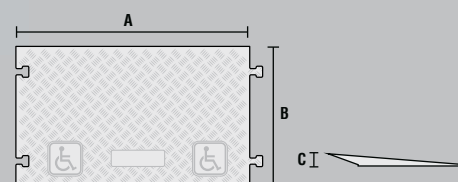

RAILS - BCPRL-3GD-DO



	MODEL	A: LENGTH	B: WIDTH	C: HEIGHT	WEIGHT	COLOR
RAMPS	BCPRP-3GD-DO	36 in. (91.44 cm) (SINGLE RAMP)	21.88 in. (55.58 cm) (SINGLE RAMP)	2 in. (5.08 cm)	40 lb. (18.1 kg) (PAIR OF RAMPS)	Blue
RAIL	BCPRL-3GD-DO	2 in. (5.08 cm)	54 in. (137.16 cm)	2 in. (5.08 cm)	12.7 lb. (5.8 kg)	Yellow



ADA Accessibility Ramps in use at a racing venue



ADA Accessibility Ramps and Protector Bridges in use at a field event