


# Electric Trailer Dolly

CHANGING THE WAY YOU MOVE OBJECTS & MATERIALS

MANUFACTURED HOMES • SMALL JET PLANES  
RECREATIONAL VEHICLES • HORSE TRAILERS  
MOTOR BOATS • ASSEMBLY LINES



BPMM-1000

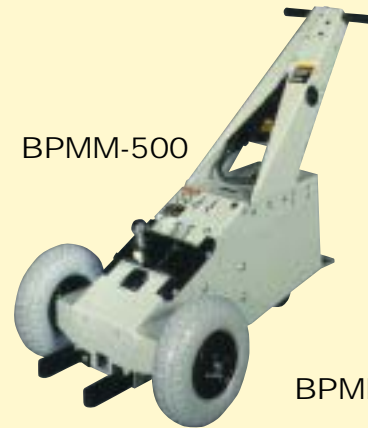

BPMM-500



BPMM-700



BPMM-3000



BPMM-3000-15

**Power Move Masters** are compact in size and handle with ease. They are highly maneuverable, making them optimal for turning in tight spaces, yet simple to operate. DC powered for smooth, quiet operation and feature variable speed control for generous low speed torque and precise operation. They come with built in battery chargers for quick recovery. Most models feature robust hydraulics to ensure superb push or pull traction. In addition, their ergonomic design provides stability and simple control. A variety of hitch attachments along with other options available, contact factory.

MODEL NUMBER	TONGUE-WEIGHT LOAD FROM LIFT	MAXIMUM PULL WEIGHT (POUNDS)	OVERALL (W x L x H)	TIRE SIZE	NET WT. INCLUDING BATTERY (POUNDS)
BPMM-500	500 lbs.	3,000	29" x 49" x 39"	4" x 10"	327
BPMM-700	700 lbs.	5,000	33" x 49" x 40"	9-1/2" x 18"	391
BPMM-1000	1,000 lbs.	55,000	38" x 53" x 38"	9-1/2" x 18"	605
BPMM-3000	3,000 lbs.	70,000	36" x 78" x 43"	9-1/2" x 18"	1500
BPMM-3000-15	3,000 / 1,500 lbs.	80,000	36" x 96" x 43"	9-1/2" x 18"	2100

<b>SPECIFICATIONS</b>	<b>BPMM-500</b>	<b>BPMM-700</b>	<b>BPMM-1000</b>	<b>BPMM-3000</b>	<b>BPMM-3000-15</b>
Overall Length	49"	49"	53"	78"	96"
Overall Width	29"	33"	38"	36"	36"
Overall Height	39"	40"	38"	43"	43"
Weight (including batteries)	285 lbs.	340 lbs.	550 lbs.	1,500 lbs.	2,100 lbs.
Tongue Weight Load (front lift)	500 lbs.	700 lbs.	1,000 lbs.	3,000 lbs.	1,500 lbs.
Tongue Weight Load (center wt.)	n/a	n/a	n/a	n/a	3,000 lbs.
Caster Wheel Size (rear)	5"	6"	6"	n/a	n/a
Steering Wheel Size (rear)	n/a	n/a	n/a	480 x 8"	480 x 8"
Tire Size (front)	4.1 x 3.5 x 6"	18 x 9.5 x 8"	18 x 9.5 x 8"	18 x 9.5 x 8"	18 x 9.5 x 8"
Locking Type Wheel	Pull Pin	Pull Pin	n/a	n/a	n/a
Replacement Batteries	(1) SRM 31	(1) SRM 31	(2) SRM 31	(4) SRM 31	(4) SRM 31
<b>FEATURES &amp; OPTIONS</b>					
Single Speed Control	0	0	N/A	N/A	N/A
Variable Speed Control	S	S	S	S	S
Built-In Battery Charger	S	S	S	S	S
Battery Level Indicator	0	0	0	0	0
Motor 3/4 HP	S	S	N/A	N/A	N/A
Motor 2 HP	0*	0*	N/A	N/A	N/A
Motor 2 HP (continuous duty)**	0	0	0	0	0
Hydraulic Lift (front 7" travel)	0	0	0	N/A	S
Hydraulic Lift HD (16" travel)	N/A	N/A	N/A	S	S
Tire Chains	0	0	0	0	0
Non-Marking Tires (grey)	S	N/A	N/A	N/A	N/A
Non-Marking Tires (solid)	N/A	0	0	0	0
Locking Type Hub	N/A	0	N/A	N/A	N/A
Electric Trailer Brake Connection	0	0	0	0	S
All-Terrain Tire Package	N/A	N/A	0	N/A	N/A
Weight Kit	0	0	0	0	0
<b>SPEED / TORQUE PKG.</b>					
Max. 1 mph & approx. 1500 ft. lbs.	N/A	N/A	0	0	0
Max. 1.6 mph & approx. 1000 ft. lbs.	N/A	N/A	S	S	S
Max 2.7 mph & approx. 600 ft. lbs.	N/A	N/A	0	0	0
Max 0.52 mph & approx. 500 ft. lbs.	S	N/A	N/A	N/A	N/A
Max 0.73 mph & approx. 500 ft. lbs.	N/A	S	N/A	N/A	N/A

**Beacon Industries, Inc.**

12300 Old Tesson Rd.  
 St. Louis, MO 63128-2247 USA  
 Phone: (314) 487-7600 Fax: (314) 487-0100  
[www.beacontechnology.com](http://www.beacontechnology.com)  
 E-Mail: [sales@beacontechnology.com](mailto:sales@beacontechnology.com)