

Beacon Loading Traffic Lights Dock Signaling

Beacon Traffic Signal Lights increase safety by providing visual communication anywhere a positive go / no-go signal is required.

Common Applications:

- *Loading Docks*
 - *Car Washes*
 - *Parking Lots and Garages*
 - *Drive Thru Windows*
 - *Controlled Access Entrances*
- **Models with long life, energy efficient LEDs or economical incandescent signal lamps.**
 - **Available in two unit sets (for mounting on opposite sides of door) or single units that can stand alone or be connected to auxiliary safety systems.**
 - **Durable plastic housing (in safety yellow or black) will not rust, pit, or corrode.**
 - **Integral eyebrow-type sun visors provide extended visibility while shielding the lights from rain and snow.**
 - **Shallow depth of unit reduces risk of damage and convenient mounting holes provide simple installation.**
 - **UL & cUL Listed - Available in 12VDC, 24VDC and 115VAC.**




BEACON[®] 

Beacon Industries, Inc.

12300 Old Tesson Rd.

St. Louis, MO 63128-2247 USA

PH: 314-487-7600 FAX: 314-487-0100

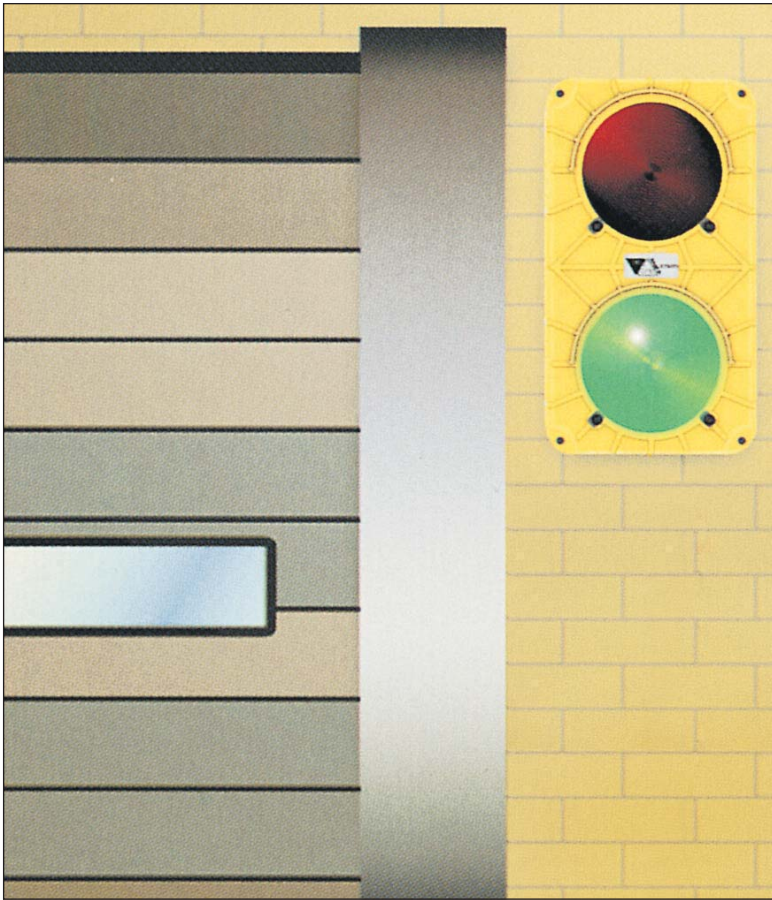

Beacon Traffic Lights Signaling System Alerts Truck Drivers and Loading Dock Personnel to the Safety Status of Docked or Docking Trucks...

The BG30 System utilizes two units – one outside of the loading dock and one located on the inside. The system is controlled by a toggle switch mounted on the inside light. (Remote switching is possible.) When the outside light is flashing red the inside light is green. This tells drivers not to move the truck and indicates that loading and unloading may proceed. When the toggle is flipped, the red light inside warns dock workers to stay out of the trailer, and green tells the driver he is free to move the vehicle.

The BSG10 is available for applications where opposing signals are not required. Ideal for installations utilizing external controllers such as drive thru indicators and for OEM applications.

TECHNICAL SPECIFICATIONS

Housing Safety Yellow or Black Polypropylene
 Power Source 12 or 24 volt DC operation or 115 volt AC operation
 Lens diameter 4 1/4"
 Dimensions 11 3/8" H x 6 3/8" W x 3 3/4" D
 Shipping weight 2 lbs. per unit

Super Bright LED Signals

- Reduce energy costs by 90% compared to conventional incandescent lights
- No filament means long life
- Require no maintenance
- Three year limited warranty on LED
- Loading dock warning signs available

CONFIGURATIONS AVAILABLE

| STOP & GO LIGHT SET (includes 1-SG10, 1-SG20) | | | | STOP & GO LIGHT, WITH FLASHER AND SWITCH | | | | STOP & GO LIGHT, NO FLASHER OR SWITCH* | | | |
|---|--------------|---------|------|--|--------------|---------|------|--|--------------|---------|------|
| Item # | Style | Voltage | Amps | Item # | Style | Voltage | Amps | Item # | Style | Voltage | Amps |
| BSG30-12RG | Incandescent | 12v | 4.34 | BSG20-12RG | Incandescent | 12v | 2.17 | BSG10-12RG | Incandescent | 12v | 2.17 |
| BSG30-12RG-LED | LED | 12v | 0.60 | BSG20-12RG-LED | LED | 12v | 0.30 | BSG10-12RG-LED | LED | 12v | 0.13 |
| BSG30-24RG | Incandescent | 24v | 2.20 | BSG20-24RG | Incandescent | 24v | 1.10 | BSG10-24RG | Incandescent | 24v | 1.10 |
| BSG30-24RG-LED | LED | 24v | 0.60 | BSG20-24RG-LED | LED | 24v | 0.30 | BSG10-24RG-LED | LED | 24v | 0.13 |
| BSG30-115RG | Incandescent | 115v | 0.42 | BSG20-115RG | Incandescent | 115v | 0.21 | BSG10-115RG | Incandescent | 115v | 0.21 |
| BSG30-115RG-LED | LED | 115v | 0.06 | BSG20-115RG-LED | LED | 115v | 0.03 | BSG10-115RG-LED | LED | 115v | 0.10 |

*Models and specifications subject to change

* Designed for use with BSG20 or control panel with flasher
 Incandescent models require flasher for proper operation.



Beacon Industries, Inc.

12300 Old Tesson Rd.

St. Louis, MO 63128-2247 USA

PH: 314-487-7600 FAX: 314-487-0100