STEEL WHEEL RISER RAMP

Series BSWR

- 40,000 lb. capacity per pair
- All Steel construction
- Safety treadplate provides positive traction

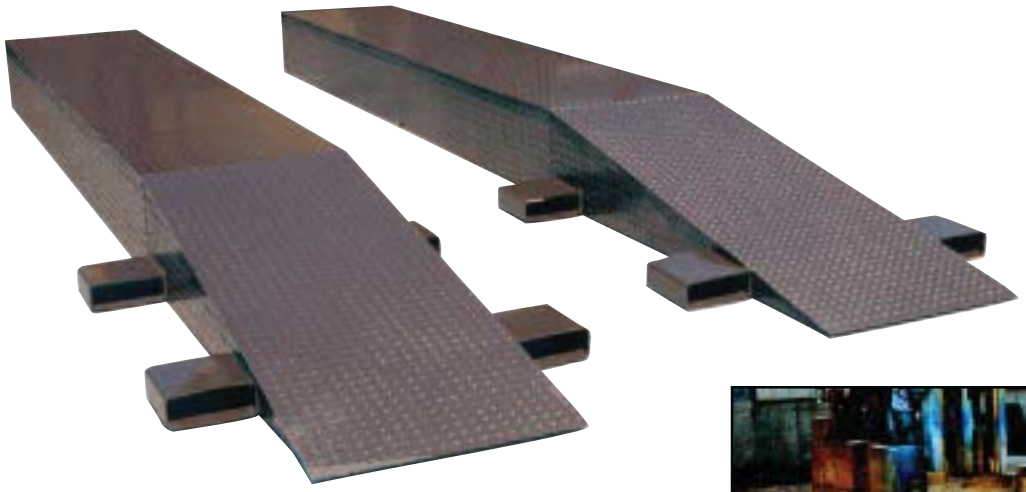

Series 400 *Steel Wheel Riser Ramp* is equipped with fork slots for ease in fork truck transporting. Ramps may be stacked for compact storage when not in use. Fork pockets are 7 1/2" wide by 2 1/2" high usable.

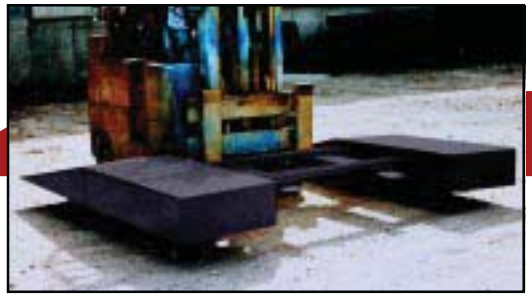

Optional pre-aligned, pre-spaced parallel ramps attached by a pick-up connector. Lift trucks simply lower the unit in place. Overall width is 102". Use suffix - BCPL.

			18" WIDE		24" WIDE	
HEIGHT	OVERALL LENGTH	LEVEL LENGTH	MODEL	Weight (EA.)	MODEL	Weight (EA.)
6"	48"	24"	BSWR-400-18-6-48	119	BSWR-400-24-6-48	144
	60"	36"	BSWR-400-18-6-60	144	BSWR-400-24-6-60	175
	72"	48"	BSWR-400-18-6-72	177	BSWR-400-24-6-72	216
	84"	60"	BSWR-400-18-6-84	203	BSWR-400-24-6-84	246
8"	60"	28"	BSWR-400-18-8-60	167	BSWR-400-24-8-60	199
	72"	40"	BSWR-400-18-8-72	196	BSWR-400-24-8-72	233
	84"	52"	BSWR-400-18-8-84	235	BSWR-400-24-8-84	281
	96"	64"	BSWR-400-18-8-96	264	BSWR-400-24-8-96	315
10"	60"	20"	BSWR-400-18-10-60	190	BSWR-400-24-10-60	224
	72"	32"	BSWR-400-18-10-72	222	BSWR-400-24-10-72	261
	84"	44"	BSWR-400-18-10-84	267	BSWR-400-24-10-84	315
	96"	56"	BSWR-400-18-10-96	299	BSWR-400-24-10-96	353
12"	72"	24"	BSWR-400-18-12-72	248	BSWR-400-24-12-72	289
	84"	36"	BSWR-400-18-12-84	284	BSWR-400-24-12-84	329
	96"	48"	BSWR-400-18-12-96	335	BSWR-400-24-12-96	391
	108"	60"	BSWR-400-18-12-108	370	BSWR-400-24-12-108	431

Steel Wheel Riser Ramp is designed to facilitate compliance with OSHA requirements for a 10% maximum grade of ascend-ing or descending loaded fork trucks.

Beacon Industries, Inc.
12300 Old Tesson Rd.
St. Louis, MO 63128-2247 USA
Phone: (314) 487-7600 Fax: (314) 487-0100
www.beacontechnology.com
E-Mail: sales@beacontechnology.com