

BTG SERIES TUFF GUARD SAFETY RAILING

Reduce costs associated with collision related employee injury, machinery downtime, insurance claims and building repairs.



- Rated to withstand forklift impacts of up to 10,000 lbs at 6 mph
- Easy 4 bolt assembly fasteners included
- ½" thick, 8"x8" steel baseplates anchors included
- Plastic insert caps for post closure and enhanced appearance
- 10 gauge steel rails, 12" high x 2-5/8" deep available in lengths from 1' to 12'
- 4"x4"x3/16"structural steel tubing post available in 18", 30" or 42" height
- Offset post options available
- Lift-out rail attachment option
- Swing gates available from 2' to 6' wide
- Powder coated safety yellow other color options available upon request


















BTG SERIES TUFF GUARD SAFETY RAILING

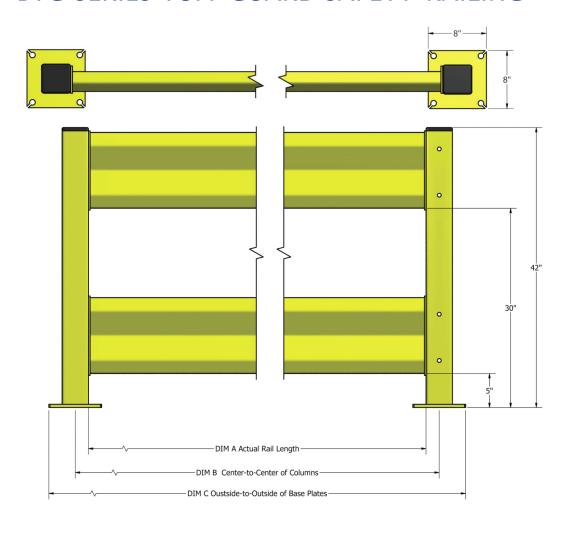

TUFF GUARD RAILS			
m. C			
20"			
32"			
14"			
56"			
58"			
30"			
92"			
04"			
16"			
28"			
40"			
52"			

TUFF GUARD POSTS		
Model	Description	Height
BTGP18	4" Sq Inline-End Post w/ Hardware	18"
BTGP18-C	4" Sq Corner Post w/ Hardware	18"
BTGP30	4" Sq Inline-End Post w/ Hardware	30"
BTGP30-C	4" Sq Corner Post w/ Hardware	30"
BTGP42	4" Sq Inline-End Post w/ Hardware	42"
BTGP42-C	4" Sq Corner Post w/ Hardware	42"

Offset post options can be obtained by contacting Beacon at (800) 454-7159 or or sales@beacontechnology.com