


✓ Proven Reliability

✓ Industrial Components


✓ Solid Steel Construction

# SKID TILTER



**Use with Open Bottom  
Pallets or Skids**

**AC • 12V DC • AIR/OIL**

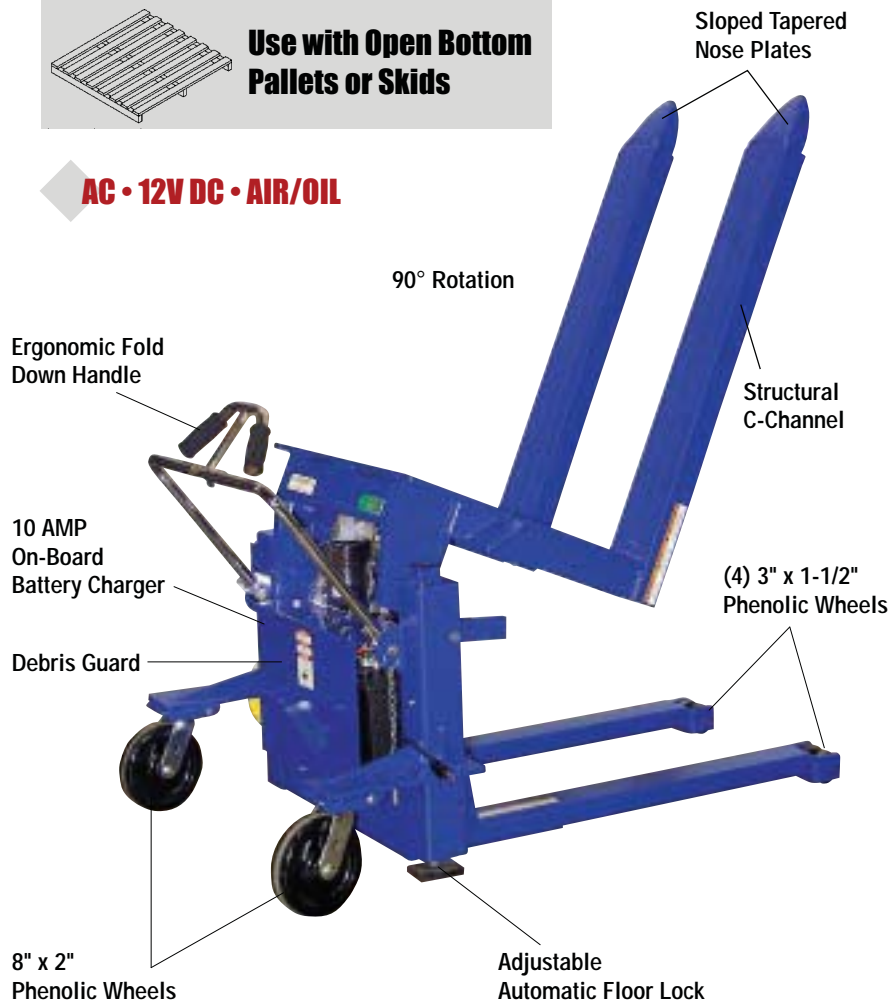


**Models**  
**BTM-20 • BTM-40 • BTM-60**

Lift and position filled tote boxes or baskets without the need of a fork truck or lift table using the newly designed heavy-duty **Tilt Master**. This unit will function as a transporter by moving completed products from work station to work station without waiting for a fork truck. A newly designed folding ergonomic handle has dual steering grips for quick and easy maneuverability. Unit has a thin profile to allow the user to get as close to the load as possible. These units are equipped with an automatic adjustable floor lock. As soon as the forks raise to 20° the adjustable floor lock engages. **Tilt Master** units tilt up to 90° and are to be used with open bottom pallets or skids.



## DC OPERATION STANDARD

- On-Board 10 AMP Battery Charger
- Large 8" x 2" Phenolic Steering Wheels
- Exclusive Adjustable Automatic Floor Lock
- Emergency Stop Velocity Fuse in Cylinder
- Fully Enclosed Sloped & Tapered Nose Plate Casting
- Choose AC, 12V DC or AIR/OIL Operation
- Available in Straddle (BTMS)/ Non-Straddle (BTM)

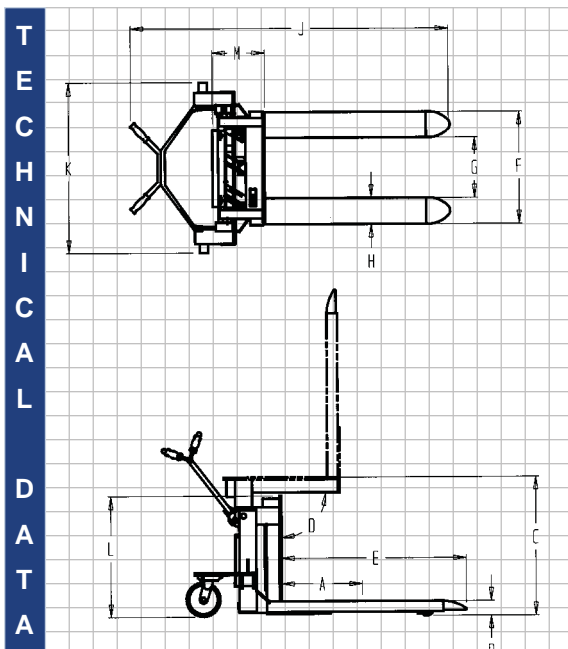

SPECIFICATIONS		BTM-20	BTM-40	BTM-60
	Capacity (lbs.)	2,000	4,000	6,000
A	Load Center	20"	20"	20"
B	Lowered Height	3-1/2"	3-1/2"	3-1/2"
C	Lift Height	35"	35"	35"
D	Tilt Angle	90°	90°	90°
E	Usable Fork Length	38"	38"	38"
F	Overall Fork Length	43-1/2"	43-1/2"	43-1/2"
G	Outer Fork Dimensions	27"	27"	28"
H	Inner Fork Dimensions	14"	14"	13"
J	Fork Width	6"	6"	7"
K	Overall Length	60"	60"	60"
L	Width / Including Wheels	35"	35"	35"
M	Height	36-1/2"	36-1/2"	36-1/2"
	Reach	14"	14"	16"

Beacon Industries, Inc. - 12300 Old Tesson Rd. - St. Louis, MO 63128-2247 USA

Phone: (314) 487-7600 - Fax: (314) 487-0100 - [beacontechology.com](http://beacontechology.com) - E-Mail: [sales@beacontechology.com](mailto:sales@beacontechology.com)