
ALLET TILTER







Use with Open or Closed Bottom Pallets or Skids

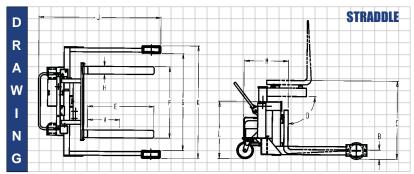

Models BTMS-20 • BTMS-

Tilt and position loads without the need of a fork truck or lift table with the Tilt Master Straddle.

Tilts up to 90° and features adjustable forks, 1/2" to 26-1/2" (I.D.), to accommodate different size pallets and skids.

Shown with Optional Power Traction Drive System



	SPECIFICATIONS	BTMS-20	BTMS-40	BTMS-60
	Capacity (lbs.)	2,000	4,000	6,000
Α	Load Center	17"	17"	17"
В	Lowered Height	2-5/8"	2-5/8"	2-5/8"
С	Lift Height	37-7/16"	37-7/16"	37-7/16"
D	Tilt Angle	90°	90°	90°
Е	Fork Length	36"	36"	36"
F	Maximum Fork Width	37"	37"	37"
G	Inner Straddle Width	49"	49"	49"
н	Fork Width	4"	4"	4"
J	Overall Length	72"	72"	72"
K	Overall Width	58-3/8"	58-3/8"	58-3/8"
L	Height	36-7/16"	36-7/16"	36-7/16"
M	Reach	21"	21"	21"

REDUCED REACH

ILT MASTER STRA








DC Operation Standard

Reduced Reach Tilt Master Straddle will minimize bending and stretching. Reduce the potential of back injuries associated with loading and unloading wire baskets, gaylord containers and corrugated palletized boxes. Reduced reach design is ideal for low height containers and small parts at the bottom of containers.

models BTMS-RR-20 • BTMS-RR-40

	SPECIFICATIONS	BTMS-RR-20	BTMS-RR-40
	Capacity (lbs.)	2,000	4,000
A	Load Center	17"	17"
Е	Lowered Height	2-5/8"	2-5/8"
C	Lift Height	32-1/2"	32-1/2"
C	Tilt Angle	90°	90°
E	Fork Length	36"	36"
F	Maximum Fork Width	37"	37"
G	Inner Straddle Width	49"	49"
H	Fork Width	4"	4"
J	Overall Length	72"	72"
ŀ	Overall Width	58-3/8"	58-3/8"
L	Height	36-7/16"	36-7/16"
N	Reach	14"	14"
		<u> </u>	

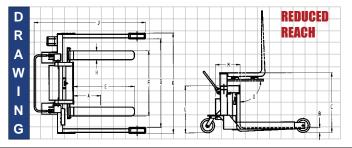

Beacon Industries, Inc.

12300 Old Tesson Rd.

St. Louis, MO 63128-2247 USA

Phone: (314) 487-7600 Fax: (314) 487-0100

beacontechnology.com

E-Mail: sales@beacontechnology.com