

BEACONTM

Vehicle Wheel Chocks


For tire diameters 27" to 48" (68.6 cm to 116.8 cm.)

FEATURES

- Highly durable, lightweight construction
- For wheels with up to a 48" outside dia.
- Weather-resistant polyurethane construction
- Resistant to oils, fuels, and solvents
- UC chocks have been 3rd party tested, certified, and trusted by fleets globally

GENERAL PURPOSE UC SERIES WHEEL CHOCKS are manufactured with highly durable, lightweight polyurethane construction. These chocks are ideal for use with over-the-road trucks, trailers, pickups and utility vehicles.


GENERAL PURPOSE - UC1400 SERIES

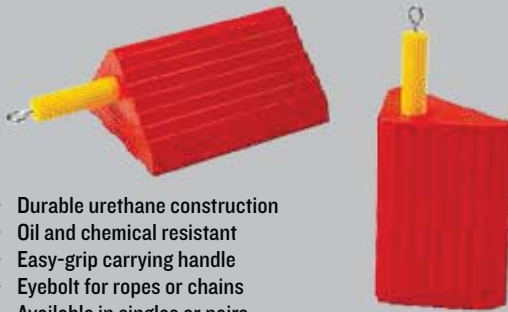

- Durable urethane construction
- Oil and chemical resistant
- Easy-grip carrying handle
- Eyebolt for ropes or chains
- Available in singles or pairs

UC1400-4.5 is certified for tire diameter 27" to 32" (68.6 cm to 81.3 cm) and gross vehicle operating weight up to 30,000 lb. (13,608 kg).

UC1400-6 is certified for tire diameter 27" to 32" (68.6 cm to 81.3 cm) and gross vehicle operating weight up to 60,000 lb. (27,216 kg).

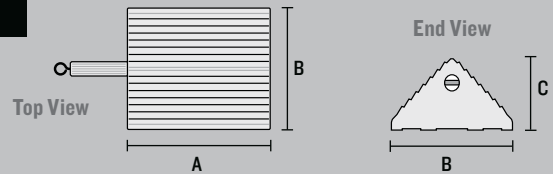

| MODEL | A: LENGTH | B: WIDTH | C: HEIGHT | WEIGHT | COLOR |
|-----------------------------------|------------------|-------------------|-----------------|---------------------------------------|--------|
| UC1400-4.5 | 10 in. (25.4 cm) | 8.5 in. (21.6 cm) | 5 in. (12.7 cm) | 4.5 lb. (2 kg) | Orange |
| UC1400-4.5-P (PAIR OF CHOCKS*) | 10 in. (25.4 cm) | 8.5 in. (21.6 cm) | 5 in. (12.7 cm) | 9.5 lb. (4.3 kg) (PAIR OF CHOCKS) | Orange |
| UC1400-6 | 10 in. (25.4 cm) | 8.5 in. (21.6 cm) | 5 in. (12.7 cm) | 6 lb. (2.7 kg) | Orange |
| UC1400-6-P (PAIR OF CHOCKS*) | 10 in. (25.4 cm) | 8.5 in. (21.6 cm) | 5 in. (12.7 cm) | 12.5 lb. (5.7 kg) (PAIR OF CHOCKS) | Orange |


* Pairs attached with a 48" long piece of 5/8" Polyester rope.

GENERAL PURPOSE - UC1500 SERIES



- Durable urethane construction
- Oil and chemical resistant
- Recessed carrying handle
- Mounting hole for ropes or chains
- Mounting brackets available
- High visibility orange color
- Available in singles or pairs

uc-4.5 is certified for tire diameter 32" to 46" (81.3 cm to 116.8 cm) and gross vehicle operating weight up to 50,000 lb. (22,680 kg).
mc-6 is certified for tire diameter 32" to 46" (81.3 cm to 116.8 cm) and gross vehicle operating weight up to 70,000 lb. (31,751 kg).

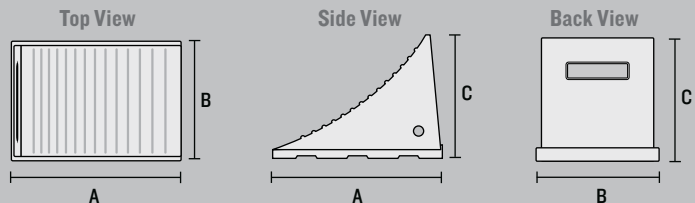

| MODEL | A: LENGTH | B: WIDTH | C: HEIGHT | WEIGHT | COLOR |
|-----------------------------------|--------------------|-----------------|-------------------|---------------------------------------|--------|
| UC1500-4.5 | 11.5 in. (29.2 cm) | 9 in. (22.9 cm) | 8.5 in. (21.6 cm) | 4.5 lb. (2 kg) | Orange |
| UC1500-4.5-P (PAIR OF CHOCKS*) | 11.5 in. (29.2 cm) | 9 in. (22.9 cm) | 8.5 in. (21.6 cm) | 9.5 lb. (4.3 kg) (PAIR OF CHOCKS) | Orange |
| UC1500-6 | 11.5 in. (29.2 cm) | 9 in. (22.9 cm) | 8.5 in. (21.6 cm) | 6 lb. (2.7 kg) | Orange |
| UC1500-6-P (PAIR OF CHOCKS*) | 11.5 in. (29.2 cm) | 9 in. (22.9 cm) | 8.5 in. (21.6 cm) | 12.5 lb. (5.7 kg) (PAIR OF CHOCKS) | Orange |



* Pairs attached with a 48" long piece of 5/8" Polyester rope.

MOUNTING BRACKET FOR UC 1400 AND UC1500 SERIES

*(Mounting Hardware NOT Included)

VERTICAL BRACKET

HORIZONTAL BRACKET

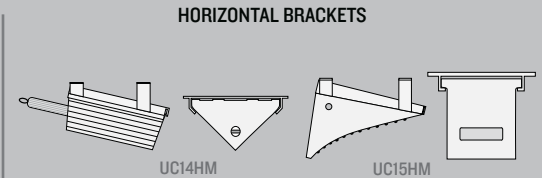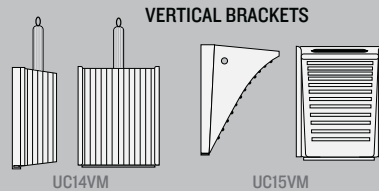


| MODEL | DESCRIPTION | WEIGHT |
|--------|----------------------------------------------------------------------------------------------------------|-------------------|
| UC15VM | Vertical Mounting Bracket* for 1500 Series Wheel Chock. Zinc Plated. 12.88" x 11.75" x 1.5" | 2.5 lb. (1.1 kg) |
| UC15HM | Horizontal Underbody Mounting Bracket* for 1500 Series Wheel Chock. Zinc Plated. 12" x 11.5" x 4.25" | 2.75 lb. (1.2 kg) |
| UC14VM | Vertical Mounting Bracket* for 1400 Series Wheel Chock. Zinc Plated. 11.88" x 10.5" x 2.13" | 2.5 lb. (1.1 kg) |
| UC14HM | Horizontal Underbody Mounting Bracket* for 1400 Series Wheel Chock. Zinc Plated. 11.75" x 10.25" x 4.75" | 2.75 lb. (1.2 kg) |

GENERAL PURPOSE - UC1600 SERIES




- Durable urethane construction
- Oil and chemical resistant
- Recessed carrying handle
- Mounting hole for ropes or chains
- High visibility orange color
- Available in singles or pairs

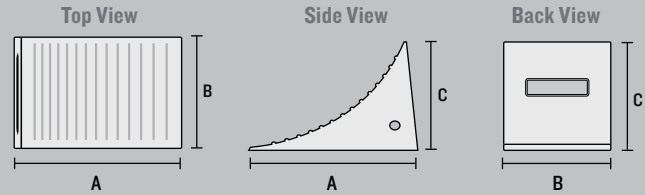


| MODEL | A: LENGTH | B: WIDTH | C: HEIGHT | WEIGHT | COLOR |
|-------------------------------|---------------------|-----------------|--------------------|--------------------------------------|--------|
| UC1600 | 11.25 in. (28.6 cm) | 8 in. (20.3 cm) | 8.25 in. (21.0 cm) | 3.5 lb. (1.6 kg) | Orange |
| UC1600-P (PAIR OF CHOCKS*) | 11.25 in. (28.6 cm) | 8 in. (20.3 cm) | 8.25 in. (21.0 cm) | 7.5 lb. (3.4 kg) (PAIR OF CHOCKS) | Orange |

UC1600 is certified for tire diameter 27" to 35" (68.6 cm to 88.9 cm) and gross vehicle operating weight up to 40,000 lb. (18,144 kg). Pairs attached with a 48" long piece of 5/8" Polyester rope.

GENERAL PURPOSE - UC1700 SERIES

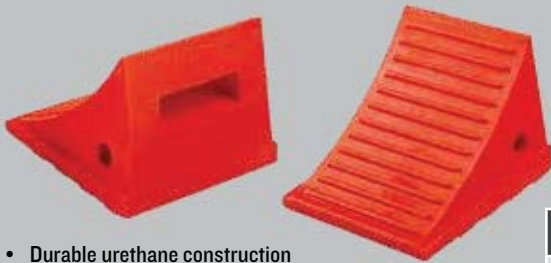

- Durable urethane construction
- Oil and chemical resistant
- Recessed carrying handle
- Mounting hole for ropes or chains
- Mounting brackets available
- High visibility orange color
- Available in singles or pairs

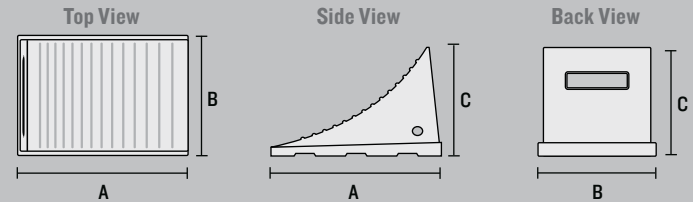

| MODEL | A: LENGTH | B: WIDTH | C: HEIGHT | WEIGHT | COLOR |
|-------------------------------|-------------------|-------------------|--------------------|------------------------------------|--------|
| UC1700 | 8.5 in. (21.6 cm) | 7.5 in. (19.1 cm) | 6.25 in. (15.9 cm) | 2.0 lb. (.91 kg) | Orange |
| UC1700-P (PAIR OF CHOCKS*) | 8.5 in. (21.6 cm) | 7.5 in. (19.1 cm) | 6.25 in. (15.9 cm) | 4.5 lb. (2 kg) (PAIR OF CHOCKS) | Orange |


UC1700 is certified for tire diameter 27" to 35" (68.6 cm to 88.9 cm) and gross vehicle operating weight up to 30,000 lb. or 13,608 kg. Pairs attached with a 48" long piece of 5/8" Polyester rope.

MOUNTING BRACKET FOR UC 1700 SERIES *(Mounting Hardware NOT Included)



VERTICAL BRACKET

VERTICAL BRACKET



| MODEL | DESCRIPTION | WEIGHT |
|--------|-------------------------------------------------------------------------------------------|------------------|
| UC17VM | Vertical Mounting Bracket* for 1700 Series Wheel Chock. Zinc Plated. 10.5" x 9.25" x 1.5" | 1.75 lb. (.8 kg) |



Chock model number UC1500-6 on mine support vehicle.