


PROTECTIVE BARRIERS

PROTECTIVE BARRIERS FOR PEOPLE AND PROPERTY

APPLICATIONS

- ◆ Inner Plant Offices
- ◆ Shipping & Receiving Areas
- ◆ Aisle Ways
- ◆ Personnel Protection
- ◆ Parking Lots
- ◆ Racks & Shelves
- ◆ Specialty Machinery
- ◆ Mezzanines
- ◆ Recreation Areas

GUARD RAIL SYSTEMS

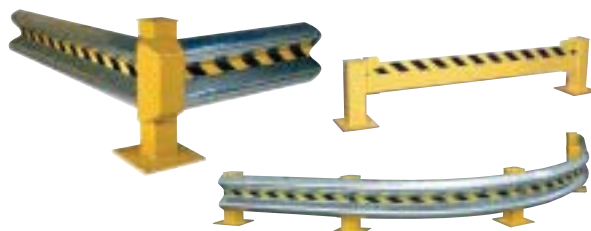

SAFETY BOLLARDS




MACHINERY & RACK GUARDS




COLUMN & PIPE PROTECTORS



RACK GUARDS

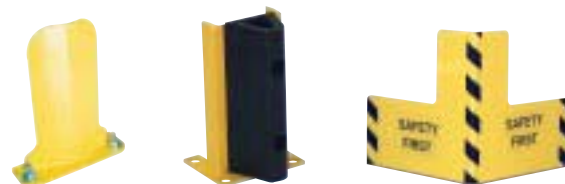

SAFETY RAILING

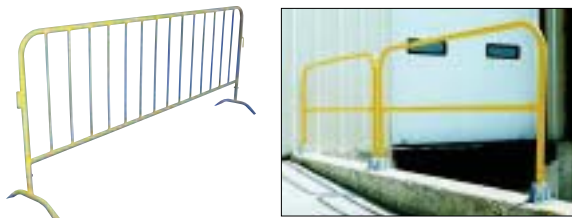

GUIDANCE BARRIERS / GATES / MISC.



Beacon Industries, Inc.
 12300 Old Tesson Rd.
 St. Louis, MO 63128-2247 USA
 Phone: (314) 487-7600 Fax: (314) 487-0100
beaontechnology.com
 E-Mail: sales@beaontechnology.com


PROTECTIVE BARRIERS SAFETY RAILING

SAFETY HANDRAILS

DESIGNED TO MEET OSHA & ANSI STANDARDS!

Safety Handrails are 42" high with a 21" mid rail. These durable railings are made of 1-5/8" O.D. schedule 40 pipe (1" I.D.). Mounting options include socket sleeves for flush concrete mount, barricade bases, or cast steel sockets for convenient handrail removal. Sockets accept wood 2" x 4" or 2" x 6" when toe boards are required.


MODEL	DIAMETER	HEIGHT	LENGTH
BVDKR-2	1-5/8"	42"	24"
BVDKR-3	1-5/8"	42"	36"
BVDKR-4	1-5/8"	42"	48"
BVDKR-5	1-5/8"	42"	60"
BVDKR-6	1-5/8"	42"	72"
BVDKR-7	1-5/8"	42"	84"
BVDKR-8	1-5/8"	42"	96"

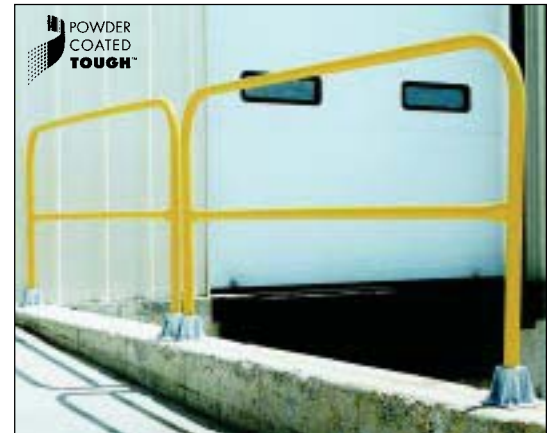

CONNECTOR KIT
includes 2 male and
2 female connectors
Model BVDKR-CON



SINGLE SOCKET
for surface mounting,
accepts wood for toeboards
Model BVDKR-P101




DOUBLE SOCKET
for surface mounting
sockets are 4" high
Model BVDKR-P102




METAL SLEEVE
Measures 4" high x 2" O.D.
For flush concrete mount
Model BVDKR-P107




3 FT. or 4 FT. GATE
Model BVDKR-G3 or
Model BVDKR-G4



**BARRICADE BASE
WITH FEET**
Model BVDKR-BB-F



**BARRICADE BASE
WITH WHEELS**
Model BVDKR-BB-W



ANCHOR BOLTS
(4) 3/8" x 3"
Model BVDKR-KIT




DOUBLE SOCKET
Conserve space when surface mounting a long
run of railing. Accepts wood 2 x 4's or 2 x 6's
when toeboards are required. Model BVDKR-P102

CROWD CONTROL BARRIERS



Easy to Connect for
Continuous Runs



Interlocking yellow portable railing has many commercial and industrial applications. Easy to move to meet changing needs. Upright bars are spaced at 5-1/4" intervals. Supporting frame is 1-3/8" diameter.

MODEL	OVERALL LENGTH	OVERALL HEIGHT
BPRAIL-102	102"	40-1/4"

PEDESTRIAN BARRIERS



Railing can be Moved
Quickly and Easily or Anchored

Keep guests flowing in restaurants, schools, offices or other indoor and outdoor applications. The unique contemporary design offers a clean look wherever the railing is placed. Sections can be connected by attaching the chains at each end. No anchoring is needed due to cast steel base liner.

MODEL	OVERALL SIZE (L x H)	BASE DIAMETER
BSSRAIL-96	96" x 42"	12"

SERIES BVDKR

SERIES BPRAIL-102

SERIES BSSRAIL-96